

## Information sheet for lorry transport

Voestalpine Steel Division Location Linz


### Safety equipment



## Clean skip / trailer



## Opening the canopy is only permitted in halls (except VA heavy plate)

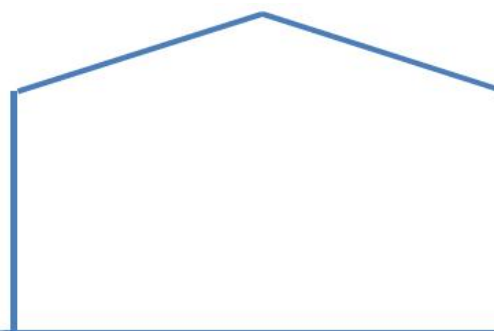

## Minimum number of load securing devices

20 safetybelt

20 x



40 x

40 Anti-slip mats



40 x


40 Edge protectors



The roof must be free of water, snow and ice before entering the hall (make sure it is tight)



**Preparing the loading area / load securing** (knowledge of load securing is a prerequisite)

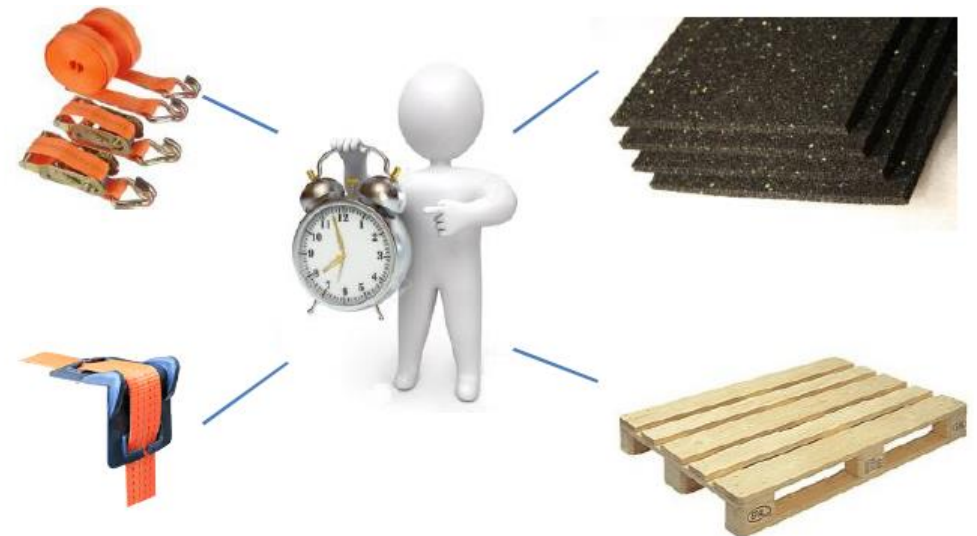



Load securing solution only at the unloading point

**It is forbidden to put the vehicle into operation once the load securing has been released.**



The road traffic regulations applies to the entire factory premises

Drive slowly



- Knowledge of the correct weight distribution on the lorry required  
Message to loading personnel

